

EZ-58.7

GENERATING SET (TECHNICAL DATA SHEET)

Standard Specifications:

1- Prime Rating:

Unlimited hours usage, with an average load factor of 80% over each 24 hour period. 10% overload is available for 1 hour in every 12 hours operation.

0 overload is permitted on standby power.

2- Standby Rating:

Limited to 500 hours annual usage, with an average load factor of 80% of the published standby power rating over each 24 hour period. Up to 300 hours of annual usage may be run continuously.

No overload is permitted on standby power.

3- Engine:


Perkins, including air filters, fuel filters, oil filter, starting motor and charging alternator etc.

4- Alternator Type:

brushless AC alternator

5- Radiator:

50°C, fan protective shroud

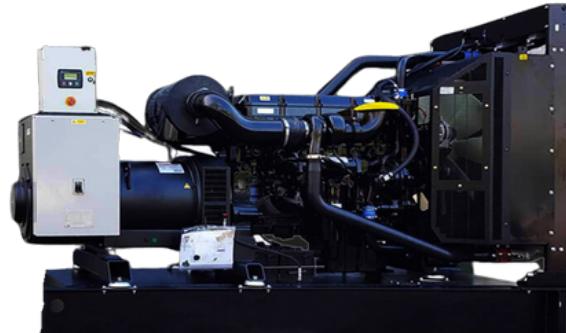

Output Rating:

PRIME:

60 Hz—1800 Rpm; 127/220 V, 3ph

53.1 kVA

42.5 kW

58.7 kVA

46.9 kW

STANDBY:

ENGINE SPECIFICATIONS

Engine Make	PERKINS
Engine Model	1103A -33TG1
No. of Cylinders	3 vertical in-line
Cycle	4 Strokes
Aspiration	Turbocharged
Cooling Method	Water cooled
Governing Type	Mechanical
Governing Class	G2 - ISO 8528 Part 1
Compression Ratio	17.25:1
Displacement	3.3 L
Bore/Stroke	105 x 127 mm
Dynamic Charging Alternator	65AMP, 12V

ALTERNATOR SPECIFICATIONS

Alternator Make	EZ Leroy Somer STAMFORD
Alternator Model	EZ TAL-A42-F S1L2N1
Number of Poles	4
Number of Winding Leads	6
Type of Bearing	Single Bearing
Insulation Class - Temp Rise	Cont. H - 125/40°C
Ingress Protection Rating	IP 23
Excitation System	Self Excited
AVR Model	R120

Comply with Standards

ISO 3046, BS 5514, DIN 6271, NEMA-MGI, DIN EN, BS 5000, IEC 60034, IEC 60947-2

Alternator Operating data

Over speed	2250 rpm
Voltage Regulation	± 1%
Harmonic Coefficient THF	< 2%
Tel. influence TIF	< 50
Cooling air flow	0.10 m3/ Sec

Powered By:

Perkins

Diesel Generator

STAMFORD
power generation

LEROY-SOMER

mecc alte

DSE



+966 556660440



Riyad | Jeddah | Tabuk



Info@Ez-power.co

Standard Specifications:

6- Fuel Tank:

Capacity of fuel tank is for 8 hours running
Built in fuel tank up to 800 kVA

7- Circuit Breaker:

3 pole LS MCCB

8- Control system alarms:

- Over and Under Speed
- Low and High Battery Volt.
- Start and Stop Failure
- Over Current
- Under / Over Generator Voltage
- Low Oil Pressure
- Emergency stop
- High engine temperature

9- Warranty policy:

- EZ POWER products has a warranty for 12 Months or 1000 hours whichever occurs first against any manufacturing defects
- Wearing parts (filters), incorrect man made operation, maintenance failures are excluded from the warranty policy

Acoustic Enclosure Specifications:

Enclosure Type	Acoustic & Weather Proof
Drainage Provision	Fuel and Water Drainage
Transportation	Tested Single Point Lifting Facility & Forklift Pockets
Ingress Protection Rating	IP 23
Lifting	ISO Standard Lifting
Canopy RAL Color	TAL 9010
Base frame RAL Color	RAL 9011
Noise Pressure level @ 7m	72 dB(A) ±3dBA

Control System:

- Large back-lit text display
- Multiple display languages
- DSENET expansion compatible
- Data logging facility
- Fully configurable via PC using USB communication
- Front panel configuration
- Efficient power save mode
- 3 phase generator sensing
- Accumulated power monitoring (kWh, kVA h, kVAh)
- Generator/load current monitoring and protection (kW)
- Breaker control via fascia buttons
- Fuel and start outputs, configurable using can
- 4 configurable DC outputs
- 4 configurable analogue/digital inputs
- Automatically transfers between mains (utility) and generator
- Increased input and output expansion capability via dseonet
- IP65 rating (with optional gasket) offers increased resistance to water ingress
- Digital inputs; Analogue Inputs



DSE4520 MKII

AUTO START & AUTO MAINS FAILURE CONTROL

Dimensions:

Type	Length (mm)	Width (mm)	Height (mm)	Fuel Tank (L)	Weight (KG)
OPEN	1900	750	1400	173	875
CLOSED	2307	1044	1415	198	1200

Note: The following dimensions are for preliminary guidance. For more detailed and accurate dimensions, please refer to the General Arrangement Drawing (GAD).



+966 556660440



Riyad | Jeddah | Tabuk



Info@Ez-power.co

Engine:



Perkins heavy duty high performance industrial type diesel engine.

COOLING SYSTEM

Total Coolant Capacity (L) 10.2 L

Cooling Fan Air Flow 53 m³/ min

Radiator Fan Load 0.4 kW

Heat Radiation to Room (PRP) 7.0kW

Heat Radiation to Room (ESP) 8.0 kW

LUBRICATION SYSTEM

Oil Filter Type Spin-On Full Flow

Total Oil Capacity 8.3L

Oil Type API-CH-4 or ACEA E5

EXHAUST SYSTEM

Muffler Type Industrial Grade

Max. Back Pressure 10 kPa

Exhaust Gas Flow 7.0/7.7 m³(PRP/ESP) / min

Exhaust Gas Temperature < 551C

FUEL SYSTEM

Recommended Fuel Class A2 Diesel

Fuel Consumption Standby 11.70 L/hr

Fuel Consumption 100% PRP 10.80 L/hr

Fuel Consumption 75% PRP 8.23 L/hr

Fuel Consumption 50% PRP 5.83 L/hr

AIR SYSTEM

Air Filter Type Dry Element

Combustion Air Flow (PRP) 2.9 m³/min

Combustion Air Flow (ESP) 3.1 m³/min

Max Air Filter Intake Restriction 8 kPa

Optional configurations:

Engine accessories:

- Heavy-duty air filter
- Coolant heater
- Lubricant oil heater
- Fuel and Water Separator
- Lube oil rotary pump

Alternator And Accessories:

- Leroy somer/stamford
- Anti condensation heater
- PMG + AVR Double bearing
- Alternator High voltage _____ kV
- RTDs for Bearing and winding

Cooling System:

- 55 degree Radiator
- Remote Radiator

Control System:

- AMF
- Parallel
- Practical type in low temperature environment
- Control Screen Heater
- Remote Annunciators
- Other (ComP, DEIF)

Circuit Breaker:

- 3/4 poles
- Fixed/handcart type
- Electric mechanism

Automatic Transfer Switch (ATS):

- ATS cabinet
- Contractor type ATS
- Motorized changeover type ATS

Start Battery:

- Nickel-cadmium battery
- Maintenance-free battery
- Battery charger and selector switch
- Charging current meter

External Fuel Tank:

- Single /double wall fuel tank (500-5000 L)
- Fuel Transfer pump

Exhaust Muffler:

- Residential grade
- Critical grade
- Hospital grade

Available for voltages :

- 400/230V, 480/277V, 380/220V, 440/254V, 416/240V, 220/127V, 208/120V

De-rating may apply.



+966 556660440



Riyad | Jeddah | Tabuk



Info@Ez-power.co