

EZ-CU625

GENERATING SET

(TECHNICAL DATA SHEET)

Standard Specifications:

1- Prime Rating:

Unlimited hours usage, with an average load factor of 80% over each 24 hour period. 10% overload is available for 1 hour in every 12 hours operation. 0 overload is permitted on standby power.

2- Standby Rating:

Limited to 500 hours annual usage, with an average load factor of 80% of the published standby power rating over each 24 hour period. Up to 300 hours of annual usage may be run continuously. No overload is permitted on standby power.

3- Engine:

Cummins, including air filters, fuel filters, oil filter, starting motor and charging alternator etc.

4- Alternator Type:

brushless AC alternator

5- Radiator:

50°C, fan protective shroud

Powered By:



LEROY
SOMER

STAMFORD
power generation



Output Rating:

PRIME:

60 Hz—1800 Rpm 480 V, 3ph

455 kW

STANDBY:

625 kVA

500 kW

ENGINE SPECIFICATIONS

Engine Make	CUMMINS
Engine Model	QSZ13-G3
Type	4 cycle, in-line, 6-cylinder turbocharged, air-cooled
Bore mm	159
Stroke Model	159
Displacement	18.9
Flywheel Dimensions	SAE1
Battery Charging Alternator	80 amps
Starting Voltage	24 volt, negative ground
Fuel System	Direct Injection Cummins PT
Fuel Filter	Spin-on fuel filters with water separator
Lube Oil Filter and Capacity (L)	Spin on full flow filter - 50 L

ALTERNATOR SPECIFICATIONS

Alternator Make	Leroy Somer I Stamford
Alternator Model	TAL-047-C I HCI544D/S5L1D-C414
Number of Poles	2/3
Winding Pitch	H
Insulation Class - Temp Rise	IP 23
Ingress Protection Rating	Self Excited
Excitation System	SX440
AVR Model	

COMPLY WITH STANDARDS

ISO 3046, BS 5514, DIN 6271, NEMA-MGI, DIN EN, BS 5000, IEC 60034, IEC 60947-2

ALTERNATOR OPERATING DATA

Over speed	2250 rpm
Voltage Regulation	± 1%
Harmonic Coefficient THF	< 3.5%
Tel. influence TIF	< 50
Cooling air flow	1.035m ³ / Sec




+966 556660440



Riyad | Jeddah | Tabuk



Info@Ez-power.co

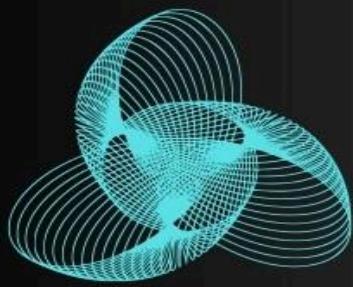

Standard Specifications:

6- Fuel Tank:

Capacity of fuel tank is for 8-10 hours running
Built in fuel tank up to 800 kVA

7- Circuit Breaker:

LS

8- Control system alarms:

- Over and Under Speed
- Low and High Battery Volt.
- Start and Stop Failure
- Over Current
- Under / Over Generator Voltage
- Low Oil Pressure
- Emergency stop
- High engine temperature

9- Warranty policy:

- EZ POWER products has a warranty for 12 Months or 1000 hours whichever occurs first against any manufacturing defects
- Wearing parts (filters), incorrect man made operation, maintenance failures are excluded from the warranty policy

Acoustic Enclosure Specifications:

Enclosure Type	Acoustic & Weather Proof
Drainage Provision	Fuel and Water Drainage
Transportation	Tested Single Point Lifting Facility & Forklift Pockets
Ingress Protection Rating	IP 23
Lifting	ISO Standard Lifting
Canopy RAL Color	TAL 9010
Base frame RAL Color	RAL 9011

Noise Pressure level @ 7m 66db(A) @ 7mt

Control System:

- Large back-lit text display
- Multiple display languages
- DSENET expansion compatible
- Data logging facility
- Fully configurable via PC using USB communication
- Front panel configuration
- Efficient power save mode
- 3 phase generator sensing
- Accumulated power monitoring (kWh, kVA h, kVAr h)
- Generator/load current monitoring and protection (kW)
- Breaker control via fascia buttons
- Fuel and start outputs, configurable using can
- 4 configurable DC outputs
- 4 configurable analogue/digital inputs
- Automatically transfers between mains (utility) and generator
- Increased input and output expansion capability via dsenet
- IP65 rating (with optional gasket) offers increased resistance to water ingress
- Digital inputs; Analogue Inputs



DSE 6120

AUTO START & AUTO MAINS FAILURE CONTROL

Dimensions:

Type	Length (mm)	Width (mm)	Height (mm)	Fuel Tank (L)	Weight (KG)
OPEN	3800	1200	1800	1110	3760
CLOSED	4920	1600	2210	1110	5160




+966 556660440




Riyad | Jeddah | Tabuk



Info@Ez-power.co

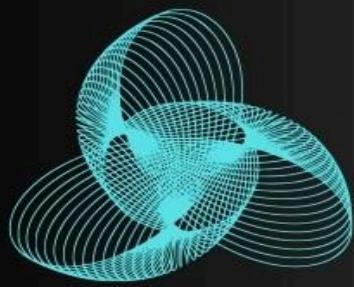

Engine:

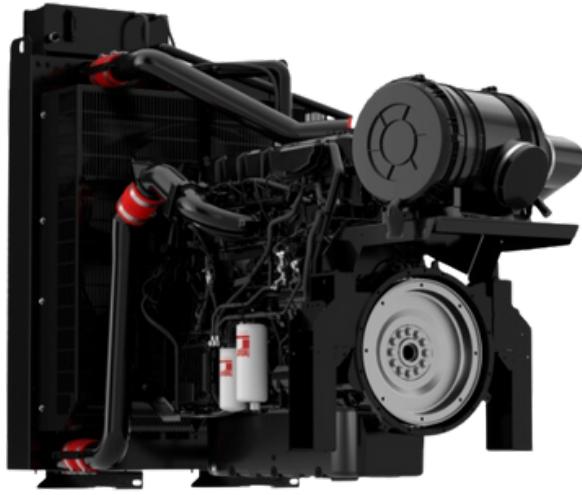

COOLPAC PERFORMANCE DATA

Cooling System Design	JWAC
Coolant Ratio	50% ethylene glycol; 50% water
Coolant Capacity (L)	93
Limiting Ambient Temp.	50 Degree Celsius
Fan Power Kw	24
Cooling System Air Flow (m3/s)	12.5
Air Cleaner Type	Normal duty

FUEL CONSUMPTION 1800 (60 HZ)

Fuel Consumption @ 110%	136
Fuel Consumption @ 100%	122
Fuel Consumption @ 75%	94
Fuel Consumption @ 50%	65
Fuel Consumption @ 25%	36

Optional configurations:

Engine accessories:

- Heavy-duty air filter
- Coolant heater
- Lubricant oil heater
- Fuel and Water Separator
- Lube oil rotary pump

Alternator And Accessories:

- Leroy somer/stamford
- Anti condensation heater
- PMG + AVR ◇ Double bearing
- alternator High voltage _____ kV
- RTDs for Bearing and winding

Cooling System:

- 55 degree Radiator
- Remote Radiator

Control System:

- AMF
- Parallel
- Practical type in low temperature environment
- Control Screen Heater
- Remote Annunciators
- Other (ComP, DEIF)

Circuit Breaker:

- 3/4 poles
- Fixed/handcart type
- Electric mechanism

Automatic Transfer Switch (ATS):

- ATS cabinet
- Contractor type ATS
- Motorized changeover type ATS

Start Battery:

- Nickel-cadmium battery
- Maintenance-free battery
- Battery charger and selector switch
- Charging current meter

External Fuel Tank:

- Single /double wall fuel tank (500-5000 L)
- Fuel Transfer pump

Exhaust Muffler:

- Residential grade
- Critical grade
- Hospital grade

Available for voltages :

- 400/230V, 480/277V, 380/220V, 440/254V, 416/240V, 220/127V, 208/120V

