

EZ-POWER EQUIPMENT

ez-power.co



EZ-CU1913

GENERATING SET (TECHNICAL DATA SHEET)

Standard Specifications:

1- Prime Rating:

Unlimited hours usage, with an average load factor of 80% over each 24 hour period. 10% overload is available for 1 hour in every 12 hours operation. 0 overload is permitted on standby power.

2- Standby Rating:

Limited to 500 hours annual usage, with an average load factor of 80% of the published standby power rating over each 24 hour period. Up to 300 hours of annual usage may be run continuously. No overload is permitted on standby power.

3- Engine:

Cummins, including air filters, fuel filters, oil filter, starting motor and charging alternator etc.

4- Alternator Type:

brushless AC alternator

5- Radiator:

50°C, fan protective shroud



Output Rating:

PRIME:		STANDBY:	
60 Hz—1800 Rpm 480 V, 3ph			
1608 kVA	1286 kW	1913 kVA	1530 kW

Voltage ranges available: from 380V to 480V (60Hz). De-rating may apply.

ENGINE SPECIFICATIONS

Engine Make	CUMMINS
Engine Model	KTA50-G9
Type	4cycle, 60°Vee, turbocharged, Low-temp aftercooled, 16-cylinder
Bore mm	159 mm (6.25 in.)
Stroke Model	159 mm (6.25 in.)
Displacement	50.3 litre (3067 in.3)
Flywheel Dimensions	SAE 0
Battery Charging Alternator	35 amps
Starting Voltage	24 volt -negative ground
Fuel System	Cummins PT™ direct injection
Fuel Filter	Dual spin paper element fuel filters w/ standard water separator
Lube Oil Filter and Capacity (L)	Spin on full flow filter - 204 Litres

ALTERNATOR SPECIFICATIONS

Alternator Make	Leroy Somer Stamford
Alternator Model	LSA51.2 S55 S7L1D-D414
Number of Poles	2/3
Winding Pitch	H
Insulation Class - Temp Rise	IP 23
Ingress Protection Rating	SEPARATELY EXCITED BY P.M.G.
Excitation System	MX341
AVR Model	

COMPLY WITH STANDARDS

ISO 3046, BS 5514, DIN 6271, NEMA-MGI, DIN EN, BS 5000, IEC 60034, IEC 60947-2

ALTERNATOR OPERATING DATA

Over speed	2250 rpm
Voltage Regulation	± 1 %
Harmonic Coefficient THF	< 3.5%
Tel. influence TIF	< 50
Cooling air flow	2.69m3/ Sec



**LEROY
SOMER**

STAMFORD
power generation




+966 556660440



Riyad | Jeddah | Tabuk



Info@Ez-power.co



EZ-POWER EQUIPMENT

ez-power.co



Standard Specifications:

6- Fuel Tank:

Capacity of fuel tank is for 8-10 hours running
Built in fuel tank up to 800 kVA

7- Circuit Breaker:

ACB - schneider

8- Control system alarms:

- Over and Under Speed
- Low and High Battery Volt.
- Start and Stop Failure
- Over Current
- Under / Over Generator Voltage
- Low Oil Pressure
- Emergency stop
- High engine temperature

9- Warranty policy:

- EZ POWER products has a warranty for 12 Months or 1000 hours whichever occurs first against any manufacturing defects
- Wearing parts (filters), incorrect man made operation, maintenance failures are excluded from the warranty policy

Control System:

Large back-lit text display

Multiple display languages

DSENET expansion compatible

Data logging facility

Fully configurable via PC using USB communication

Front panel configuration

Efficient power save mode

3 phase generator sensing

Accumulated power monitoring (kWh, kVA h, kVAr h)

Generator/load current monitoring and protection (kW)

Breaker control via fascia buttons

Fuel and start outputs, configurable using can

4 configurable DC outputs

4 configurable analogue/digital inputs

Automatically transfers between mains (utility) and generator

Increased input and output expansion capability via dsenet

IP65 rating (with optional gasket) offers increased resistance to water ingress

Digital inputs; Analogue Inputs



DSE 6120

AUTO START & AUTO MAINS
FAILURE CONTROL

Dimensions:

Type	Length (mm)	Width (mm)	Height (mm)	Fuel Tank (L)	Weight (KG)
OPEN	5830	2280	3065	2840	12700
CLOSED	30 Feet HC container			-	18400

Note: The following dimensions are for preliminary guidance. For more detailed and accurate dimensions, please refer to the General Arrangement Drawing (GAD).

Acoustic Enclosure Specifications:

Enclosure Type	Acoustic & Weather Proof
Drainage Provision	Fuel and Water Drainage
Transportation	Tested Single Point Lifting Facility & Forklift Pockets
Ingress Protection Rating	IP 23
Lifting	ISO Standard Lifting
Canopy RAL Color	TAL 9010
Base frame RAL Color	RAL 9011
Noise Pressure level @ 7m	80 dB(A)




+966 556660440



Riyad | Jeddah | Tabuk



Info@Ez-power.co




EZ-POWER

EQUIPMENT

ez-power.co



Engine:

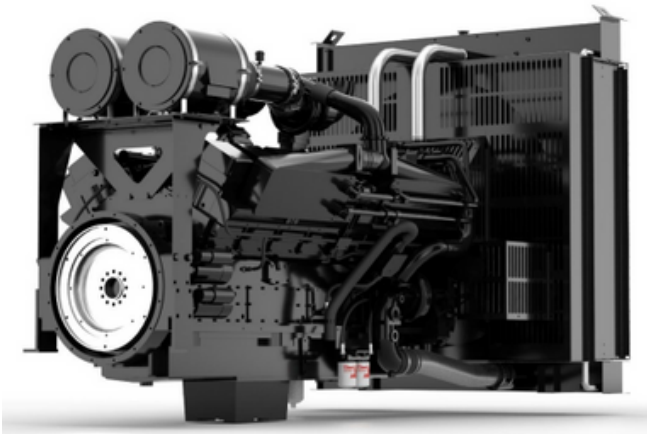

COOLPAC PERFORMANCE DATA

Cooling System Design	2 pump / 2 loop
Coolant Ratio	50% ethylene glycol; 50% water
Coolant Capacity (L)	240.0
Limiting Ambient Temp.	50.0 Degree Celsius
Fan Power Kw	33
Cooling System Air Flow (m3/s)	28.2
Air Cleaner Type	Dry replaceable element with restriction indicator

FUEL CONSUMPTION 1800 (60 HZ)

Fuel Consumption @ 110%	392
Fuel Consumption @ 100%	330
Fuel Consumption @ 75%	257
Fuel Consumption @ 50%	180
Fuel Consumption @ 25%	111

Optional configurations:

Engine accessories:

- ☐ Heavy-duty air filter
- ☐ Coolant heater
- ☐ Lubricant oil heater
- ☐ Fuel and Water Separator
- ☐ Lube oil rotary pump

Alternator And Accessories:

- ☐ Leroy somer/stamford
- ☐ Anti condensation heater
- ☐ PMG + AVR ◇ Double bearing
- ☐ alternator High voltage _____kV
- ☐ RTDs for Bearing and winding

Cooling System:

- ☐ 55 degree Radiator
- ☐ Remote Radiator

Control System:

- ☐ AMF
- ☐ Parallel
- ☐ Practical type in low temperature environment
- ☐ Control Screen Heater
- ☐ Remote Annunciators
- ☐ Other (ComP, DEIF)

Circuit Breaker:

- ☐ 3/4 poles
- ☐ Fixed/handcart type
- ☐ Electric mechanism

Automatic Transfer Switch (ATS):

- ☐ ATS cabinet
- ☐ Contractor type ATS
- ☐ Motorized changeover type ATS

Start Battery:

- ☐ Nickel-cadmium battery
- ☐ Maintenance-free battery
- ☐ Battery charger and selector switch
- ☐ Charging current meter

External Fuel Tank:

- ☐ Single /double wall fuel tank (500-5000 L)
- ☐ Fuel Transfer pump

Exhaust Muffler:

- ☐ Residential grade
- ☐ Critical grade
- ☐ Hospital grade

Available for voltages :

- ☐ 400/230V, 480/277V, 380/220V, 440/254V, 416/240V, 220/127V, 208/120V



+966 556660440



Riyad | Jeddah | Tabuk



Info@Ez-power.co